# certnz

# **Quarterly Report:** Data Landscape 2021

1 July – 30 September

# /// Contents

1. Introduction2
2. Incidents and referrals2
Incident summary 2
Incidents per quarter
3. Reporting by incident category 4
Breakdown by category4
Breakdown of scam and fraud incidents5
Breakdown of incidents affecting individuals6
Breakdown of incidents affecting organisations
Breakdown of reported vulnerabilities8
4. Impacts
Direct financial loss9
Distribution of direct financial losses9
Types of loss11
5. Demographics
Reporting by sector
Reporting by region14
Reporting by age15
6. About CERT NZ
A word about our information17
Reporting an incident to CERT NZ 17
Incident categories we use
Vulnerability categories we use19
Malware categories we use19



# **1.** Introduction

The CERT NZ Data Landscape report for Quarter Three (Q<sub>3</sub>) 2021 provides a standardised set of results, graphs and an analysis of the latest trends. Analytical comment is provided where meaningful or interesting trends were identified.

The report covers Quarter three (calendar year) 2021; from 1 July – 30 September 2021, and is supplemented by the:

• CERT NZ Quarterly Report: Highlights Q3 2021, providing an overview and commentary of the cyber security incidents reported during the same quarter.

Both documents can be found on our website at: https://www.cert.govt.nz/about/quarterly-report/

# 2. Incidents and referrals

### **Incident summary**

Between 1 July and 30 September 2021, 2,072 incidents were reported to CERT NZ.


Of the 2,072 incidents reported:

- 1,545 (75%) were responded to directly by CERT NZ
- 263 (13%) were referred to New Zealand Police
- 197 (10%) were referred to the Department of Internal Affairs (DIA)
- 51 (2%) were referred to the New Zealand Telecommunications Forum (TCF)
- 10 (0.5%) were referred to Consumer Protection
- 4 (0.2%) were referred to the Commerce Commission
- 2 (0.1%) were referred to the National Cyber Security Centre (NCSC)

The sum of above percentage values is 100.8% due to rounding.



# Incidents per quarter

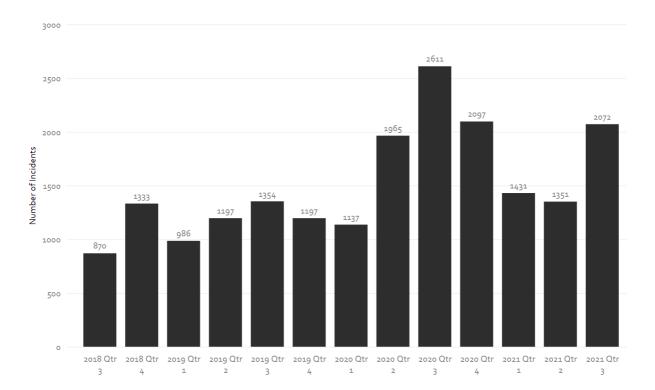


### Figure 1: Number of incidents reported by quarter



# 3. Reporting by incident category

### Breakdown by category

With the rise in total incident report numbers, several incident categories also increased. The most notable changes include a 73% increase in phishing and credential harvesting from 618 in Q2, and a 372% increase in malware from 32 in Q2. The increase in malware is due to FluBot campaigns hitting New Zealand at the end of Q3 as discussed in the Highlights report.

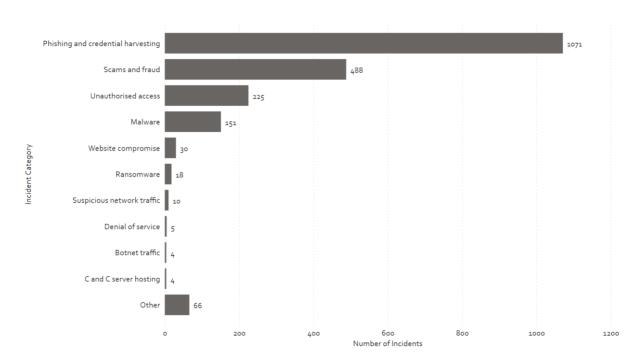

#### Figure 2: Breakdown by incident category

### Covid-19 related scams

CERT NZ is the central coordination point for reports about COVID-19 related scams and misinformation. CERT NZ responds to COVID-19-related scams and refers all misinformation reports to the Ministry of Health and Department of Prime Minister and Cabinet, who proactively address any issues raised. Because CERT NZ does not analyse or verify the legitimacy of the misinformation, we are unable to quantify the number of actual misinformation reported.

During Q<sub>3</sub> 2021, CERT NZ responded to 7 incidents relating to Covid-19 scams.


7 Covid-19 related scams

4

# Breakdown of scam and fraud incidents

Of the incidents responded to during Q<sub>3</sub>, 488 (24%) were about scams and fraud. The scam and fraud category consistently features in the top three incident categories responded to by CERT NZ.

In 2019, CERT NZ began breaking down scam reports into sub-categories, to gain further insights into the types of online scams and fraud affecting New Zealanders. The graph below shows the number of reports per scam sub-category.

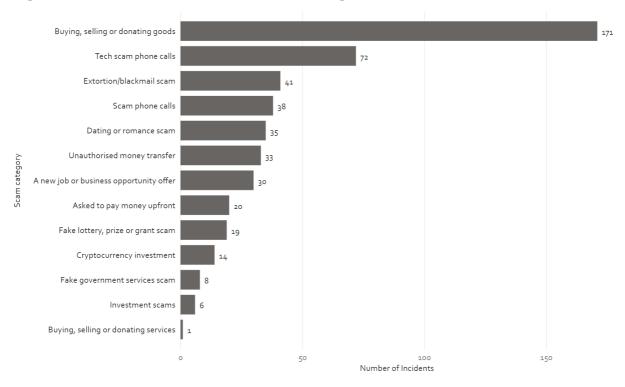

#### Figure 3: Breakdown of scam and fraud categories




# Breakdown of incidents affecting individuals

In Q3, 1,215 (59%) incidents responded to by CERT NZ were identified as affecting individuals.

Scams and fraud remains the highest volume category reported to CERT NZ by individuals, increasing by 28% on Q2.

The other top categories, phishing and credential harvesting, unauthorised access, and malware, also increased by a significant margin (87%, 43%, and 560% respectively).

#### Figure 4: Breakdown of incidents affecting individuals

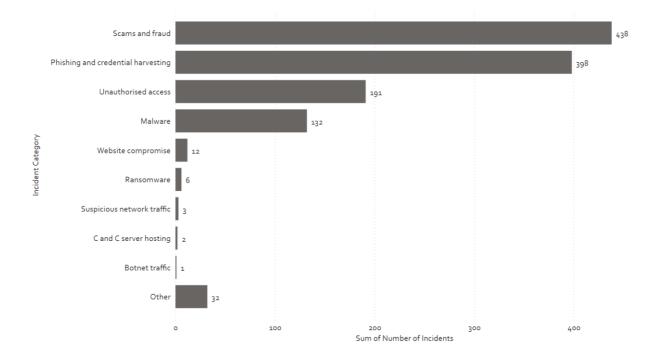




# Breakdown of incidents affecting organisations

15% (315) of incidents responded to during Q3 specified that they were about incidents affecting organisations, compared with 18% (246) in Q2 2021.

Phishing and credential harvesting continues to be the largest category of incidents reported to us by organisations, accounting for 66% during Q3 2021.

The growth in scams and fraud, and unauthorised access over the past year did not continue into Q<sub>3</sub> 2021, with slight decreases in both.

There was also a notable reduction in ransomware incidents, decreasing by 64% from Q2.

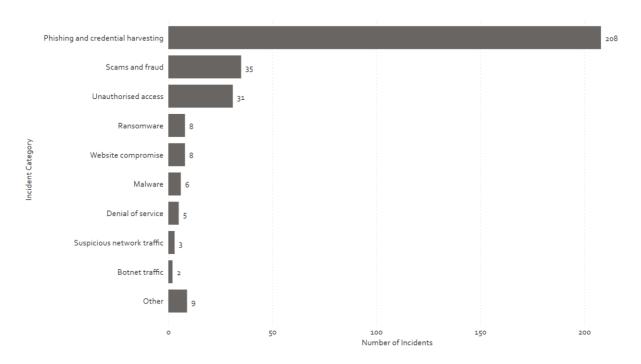


#### Figure 5: Breakdown of incidents affecting organisations



# Breakdown of reported vulnerabilities


A vulnerability is a weakness in software, hardware, or an online service that can be exploited to allow access to information or damage a system. Early discovery of vulnerabilities means they can be addressed to prevent future incidents.

CERT NZ received 20 vulnerability reports in Q3, up from 14 in Q2 2021.

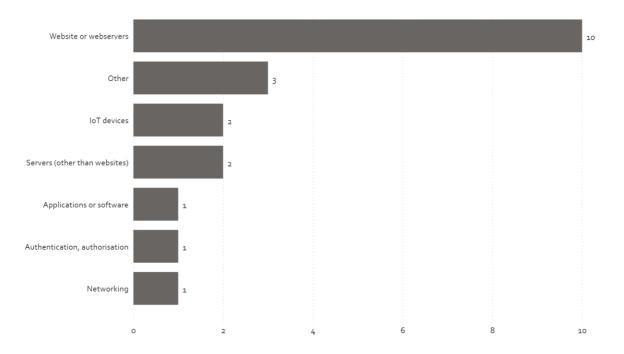

#### Figure 6: Breakdown of reported vulnerabilities

Some vulnerability reports come under CERT NZ's Coordinated Vulnerability Disclosure (CVD) policy. This is used when the person reporting the vulnerability doesn't want, or has been unable to, contact the vendor directly themselves. CERT NZ received 10 vulnerability reports using the CVD policy<sup>1</sup>, making up 50% of the 20 vulnerability reports received in Q<sub>3</sub>.

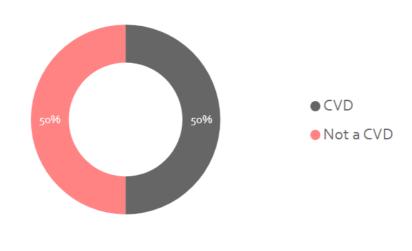

#### Figure 7: Proportion of coordinated vulnerability disclosures


<sup>&</sup>lt;sup>1</sup> https://www.cert.govt.nz/it-specialists/guides/reporting-a-vulnerability/

# 4. Impacts

# **Direct financial loss**

Direct financial losses totaled \$3,275,920 in Q3, decreasing by 16% from \$3,885,244 in Q2 2021.

#### Figure 8: Direct financial losses per quarter

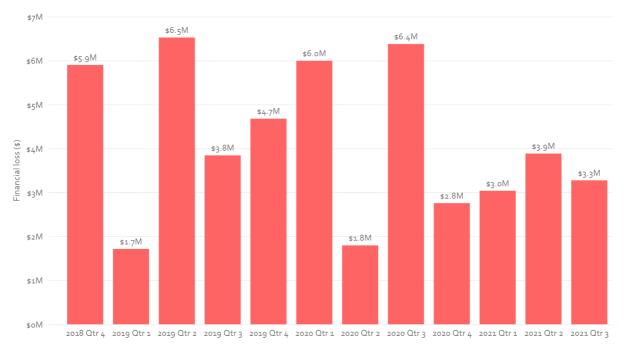

# **Distribution of direct financial losses**

Of the 323 incidents responded to by CERT NZ during Q3 which provided a financial loss value:


- 52% were below \$500, remaining relatively stable compared to the previous 12 months, and
- 7 were \$100,000 and over, compared to the 13 reported in Q2 2021.

Of the 7 incidents responded to during Q3 involving losses of \$100,000 or more:

- two related to new job or business opportunity scam
- one related to business email compromise
- one related to unauthorised access
- one related to scammed when buying, selling or donating goods online.

9



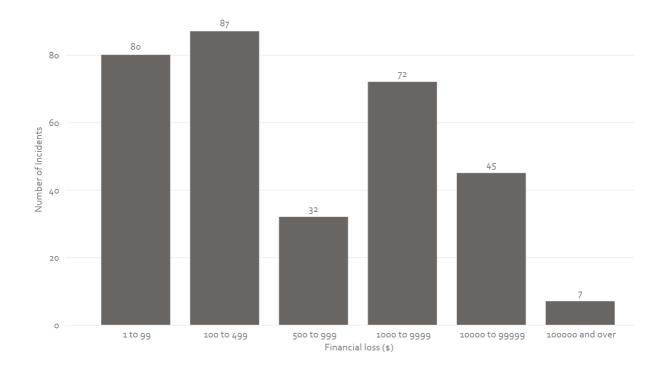



# Types of loss

327 incidents, responded to by CERT NZ during Q3, indicated financial loss had occurred. Additionally, CERT NZ responded to incidents where five other types of loss occurred.

Reported losses are broken down by type, as follows:

#### Table 1: Types of loss

16%	Financial loss	1%	Reputational loss		
	This not only includes money lost as a direct result of the incident, but also includes the cost of recovery, as an example the cost of contracting IT security services or investing in new security systems following an incident (Q2 2021: 18%).		Damage to the reputation of an individual or organisation as a result of the incident (Q2 2021: 1%).		
3%	Data loss	<1%	Technical damage		
	Loss or unauthorised copying of data, business records, personal records and intellectual property (Q2 2021: 4%).		Impacts on services like email, phone systems or websites, resulting in disruption to a business or organisation (Q2 2021: 1%).		
1%	Operational impacts	1%	Other		
	The time, staff and resources spent on recovering from an incident, taking people away from normal business operations (Q2 2021: 2%).		Includes types of loss not covered in the other categories (Q2 2021: 1%).		




# 5. Demographics

### **Reporting by sector**

Of the 315 reports about incidents affecting organisations, the finance and insurance sector accounted for 56%, jumping from 83 in Q2 to 176 in Q3.

#### Figure 10: Reports by sector

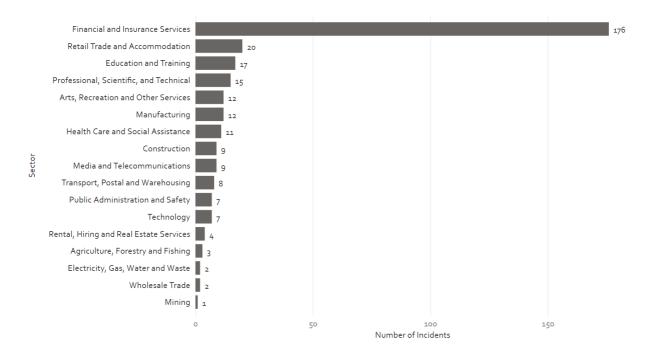



#### Figure 11: Breakdown by sector and incident category

The financial and insurance services sector reported that 95% of their incidents related to phishing and credential harvesting.



# **Reporting by region**


Several regions saw dramatic increases in incidents. In particular, Auckland increased by 58% from 326 in Q2 to 514 in Q3. Waikato also saw an increase of 73% from 56 in Q2 to 97 in Q3. Most other regions increased by more than 20%, with the biggest exception being Nelson which saw a 25% decrease from 20 in Q2 to 15 in Q3.






# Reporting by age

Of the 2,072 incidents responded to by CERT NZ during Q3, 696 (34%) provided their date of birth.

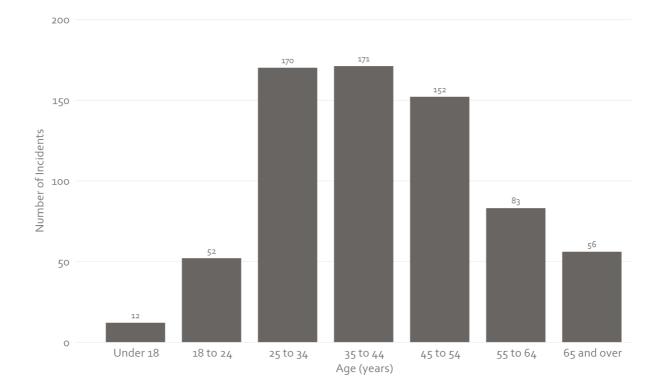

# Figure 13: Incidents affecting individuals – breakdown by age



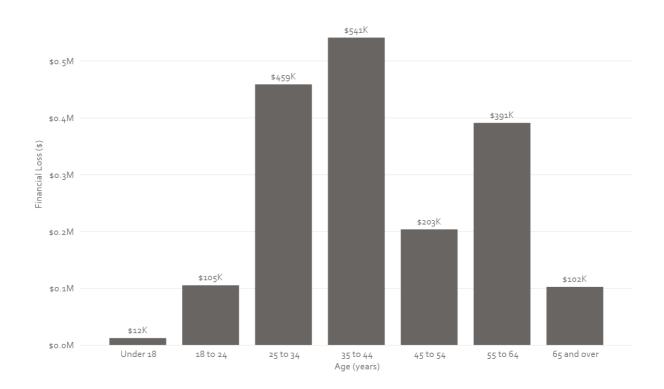

### Figure 14: Distribution of direct financial losses reported by age

Some reporters do not provide an age associated with their incident. This quarter 696 reporters did include their age range, with an associated loss amount of \$1.81 million. The distribution of this loss is shown in the graph above and table below. Most notable in this data is the decrease in loss to the 45 to 54 age band, down \$1,410k from \$1,613k in Q2 2021 to only \$203k in Q3 2021.

#### Table 2: Distribution of direct financial losses reported by age

Under 18	18 - 24	25 -34	35 - 44	45 - 54	55 - 64	65 and over
\$12,000	\$105,000	\$459,000	\$541,000	\$203,000	\$391,000	\$102,000

16

# 6. About CERT NZ

CERT NZ is New Zealand's Computer Emergency Response Team, and works to support businesses, organisations and individuals who are affected (or may be affected) by cyber security incidents. CERT NZ provides trusted, authoritative information and advice, while also collating a profile of the threat landscape in New Zealand. See www.cert.govt.nz for more information.

# A word about our information

Reporting quarters are based on the calendar year, 1 January to 31 December.

Incidents are reported to CERT NZ by individuals and organisations. They choose how much or little information they are comfortable in providing, often about very sensitive incidents.

Sometimes CERT NZ may ask for additional information about an incident to gain a better understanding, or if we might need to do technical investigations. Before sharing specific details about an incident, CERT NZ will seek the reporting party's consent.

CERT NZ is not always able to verify the information we receive, though we endeavour to do so, particularly when dealing with significant cyber security incidents.

All information provided to CERT NZ is treated in accordance with our Privacy and Information Statement as published on our website, and this report is subject to the CERT NZ standard disclaimer.

The sectors we use are based on Stats NZ's New Zealand Industry Standard Industry Output Categories.

Our regional reporting uses the sixteen regions of the Local Government Act 1974.

Age is calculated from the date of birth provided and the date we received the incident report. The 'reporting by age' data does not include reported vulnerabilities, as those are from individuals proactively reporting issues, rather than having been affected by them.

# **Reporting an incident to CERT NZ**

Anyone can report a cyber security incident to CERT NZ, from IT professionals and security personnel to members of the public, businesses, and government agencies. We also receive incident notifications from our international CERT counterparts when they identify affected New Zealand organisations in their investigations.

To report a cyber security incident, go to our website www.cert.govt.nz or call our freephone number o8oo CERT NZ (o8oo 2378 69). Your report will be received by an expert who can advise you on the best next steps to take.

With your permission, we may refer incidents to our partners such as the National Cyber Security Centre for national security threats, NZ Police for cybercrime, the Department of Internal Affairs for unsolicited electronic mail (spam), and Netsafe for cyberbullying.

### Incident categories we use

We use broad categories to group incident reports. These will be refined as the data set grows.

The **incident** report categories are:

**Botnet traffic**. Botnets are networks of infected computers or devices that can be remotely controlled as a group without their owner's knowledge and are often used to perform malicious activities such as sending spam, or launching Distributed Denial of Service attacks.

C & C server hosting. A system used as a command-and-control point by a botnet.

**Denial of Service (DoS)**. An attack on a service, network or system from a single source that floods it with so many requests that it becomes overwhelmed and either stops completely or operates at a significantly reduced rate. Assaults from multiple sources are referred to as Distributed Denial of Service attacks (DDoS).

**Malware**. Short for malicious software. Malware is designed to infiltrate, damage or obtain information from a computer system without the owner's consent. Commonly includes computer viruses, worms, Trojan horses, spyware and adware.

**Phishing and credential harvesting**. Types of email, text or website attacks designed to convince users they are genuine, when they are not. They often use social engineering techniques to convince users of their authenticity and trick people into giving up information, credentials or money.

**Ransomware**. A common malware variant with a specific purpose. If installed (usually by tricking a user into doing so, or by exploiting a vulnerability) ransomware encrypts the contents of the hard drive of the computer it is installed on, and demands the user pay a ransom to recover the files.

**Reported vulnerabilities**. Weaknesses or vulnerabilities in software, hardware or online service, which can be exploited to cause damage or gain access to information. Some are reported to CERT NZ under our Coordinated Vulnerability Disclosure (CVD) service.

**Scams and fraud**. Computer-enabled fraud that is designed to trick users into giving up money. This includes phone calls or internet pop-up advertisements designed to trick users into installing fake software on their computers.

**Suspicious network traffic**. Detected attempts to find insecure points or vulnerabilities in networks, infrastructure or computers. Attackers typically conduct a range of reconnaissance activities before conducting an attack, which are sometimes detected by security systems and can provide early warning for defenders.

**Unauthorised access**. Successful unauthorised access can enable an attacker to conduct a wide range of malicious activities on a network, infrastructure or computer. These activities generally fall under one of the three impact categories:

- compromise of the confidentiality of information
- improper modification affecting the integrity of a system
- degradation or denial of access or service affecting its availability.

**Website compromise**. The compromise, defacement or exploitation of websites by attackers for malicious purposes, such as spreading malware to unsuspecting website visitors.

### Vulnerability categories we use

The vulnerability report categories we currently use are:

**Applications or software**. Vulnerabilities discovered in software products that could be exploited by a potential attacker. They are relatively common and, when discovered, are typically patched or mitigated through controls.

**Authentication, authorisation and accounting**. Common terminology for controlling access to computer resources, enforcing policies, auditing usage, and providing the information necessary to account for services. Vulnerabilities, if exploited to disrupt these functions, would have considerable impacts on the security of a network, system or device.

**Human introduced.** Vulnerabilities arising from human-introduced errors, misconfiguration or unintentional circumvention of security controls.

**IoT devices.** Internet of Things devices are internet-connected devices used to perform distributed functions over a network.

Mobile devices. Includes phones, handheld devices, hardware, and mobile operating systems.

**Networking.** Covers vulnerabilities in network equipment, such as routers, gateways and firewalls, or the software and tools used to manage networks. This also includes vulnerabilities which may exist in routing, and could expose network traffic to compromise.

**Operating systems or platforms.** Low level software which provides, or supports, the basic operating environment of a computer.

PCs and laptops. Desktop and laptop computer hardware.

Printers, webcams and other peripherals. Hardware components used to support PC or laptop functions.

**Servers (other than websites).** Other kinds of enterprise servers that organisations would typically use, such as mail, application and proxy servers. Vulnerabilities can be found in the hardware or firmware, and can also arise from misconfiguration or failures in security management.

**Websites or webservers.** Includes vulnerabilities in websites themselves, or the infrastructure they run on. An example would be unpatched websites or webservers which would potentially give an attacker the ability to compromise a website.

#### Malware categories we use

Here are some of the key terms we use when talking about malware:

**Malware** – is short for "malicious software". Malware is designed to infiltrate, damage or obtain information from a computer system without the owner's consent.

**Virus** – is malicious software or code designed to infect and spread throughout a computer after being tricked into being run by a user.

**Worm** – a worm is malicious software that self-replicates and is designed to infect other connected computers or networks without any interaction from a user.

**Ransomware** – a common malware variant with a specific purpose. If installed (usually by tricking a user into doing so or by exploiting a vulnerability) ransomware encrypts the contents of the hard drive of the computer it is installed on, and demands the user pay a ransom to recover the files.

**Trojan** – malicious software that attempts to hide its malicious code by masquerading as an legitimate program or file – such as a document or excel attachment to an email that is actually executable malware.

Adware – malicious software that infects computers designed to display advertisements, redirect search requests to advertising websites, harvest marketing-type data about the user or even stealthily browse to and click through web advertising without the users knowledge to artificially increase clicks and generate advertising revenue.

**Spyware** – as its name suggests, this type of malware is designed to spy on what a user is doing and collect information without the user knowing, like credit card details, passwords and other sensitive information.

**Botnet** – a group of malware infected computers able to be controlled remotely by an attacker as a group and at scale.

**Variants** – over time, malware types have been added to by their original developers and others, resulting in different types of malware evolving from a common base. The new 'variants' might be closely related to other malware and are often grouped into 'families'. An example would be the Andromeda malware, which shares some features of earlier malwares like Dridex and Dorkbot.

**Module/Stages** – as a method of avoiding detection, malware authors have started breaking up malware into modules and stages. Typically, a smaller-sized initial stage is used to conduct the initial compromise which, once established, pulls down additional tools at different stages as required for the attacker's particular objectives.

**Persistence** – a lot of malware is designed to establish itself on systems and networks in a way that makes it very hard to remove, even if detected. Establishing persistence is one of the very first goals malware seeks to achieve when it is first executed on a system.

**Remote Access Trojan (RAT)** – a type of malware that, once executed, allows an attacker remote access to the infected computer or system.

**Web shell** – a web shell is able to be uploaded to a web server to allow remote access to the web server, including the web server's file system. This can enable an attacker to gain remote access to a computer system via the internet, allowing the web shell to act as a remote access Trojan.

**Keylogger** – a programme that records users' keyboard inputs without their knowledge, often to steal credentials like passwords.

